


● Applicable standards:

Design And Manufacture: DIN3352  
 Face To Face: DIN3202-F5, EN558-1  
 End Flange Dimensions: DIN2543(PN16), DIN2544(PN25),  
 DIN2545(PN40), EN1092-1  
 Pressure Test: DIN3230, EN12266-1



● Applicable standards:

Design And Manufacture: DIN3352  
 Face To Face: DIN3202-F7, EN558-1  
 End Flange Dimensions: DIN2546(PN63), DIN2547(PN100),  
 DIN2548(PN160), EN1092-1  
 Pressure Test: DIN3230, EN12266-1

Dimensions data



PN	DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600
16	L	240	250	270	280	300	325	350	400	450	500	550	600	700	800
	H	365	410	432	498	565	378	790	980	1190	1410	1550	1750	1900	1600
	W	180	200	220	250	280	300	300	350	400	450	500	550	700	800
	Weight(kg)	15	20	29	34	45	65	90	135	205	330	450	689	948	1420
25	L	240	250	270	280	300	325	350	400	450	500	550	600	700	800
	H	365	410	440	488	585	395	802	990	1200	1420	1560	1760	2180	2610
	W	180	200	220	250	280	300	300	350	400	450	500	550	700	800
	Weight(kg)	17	21	32	35	50	75	95	155	242	345	472	695	1142	1450
40	L	240	250	290	310	350	400	450	550	650	750	850	950	1150	1350
	H	365	420	452	198	595	708	810	1010	1220	1440	1580	1780	2200	2630
	W	180	200	220	250	280	300	350	400	500	550	600	700	750	800
	Weight(kg)	18	22	30	38	51	70	110	223	270	500	665	850	1350	1609
63	DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600
	L	240	250	290	310	350	400	450	550	650	750	850	950	1150	1350
	H	385	440	480	525	625	740	810	1045	1260	1490	1630	1840	2260	2720
	W	180	200	250	250	280	400	450	500	500	600	650	700	800	900
100	L	-	250	290	310	350	400	450	550	650	750	750	950	-	-
	H	-	460	500	550	660	765	850	1090	1310	1550	1710	1920	-	-
	W	-	220	250	280	300	400	450	500	550	600	650	700	-	-
	Weight(kg)	-	300	360	390	450	525	600	750	-	-	-	-	-	-
160	DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600
	L	240	250	290	310	350	400	450	550	650	750	850	950	1150	1350
	H	-	612	677	686	751	868	997	1224	-	-	-	-	-	-
	W	-	350	400	400	500	550	650	750	-	-	-	-	-	-

● Materials of parts

No.	Part Name	Material
1	Body	GS-C25+13Cr
2	Wedge	GS-C25+13Cr
3	Stem	A182 F6
4	Nut	A194 2H
5	Bolt	A193 B7
6	Gasket	Graphite
7	Bonnet	GS-C25
8	Packing	Graphite
9	Pin	Carbon Steel
10	Gland Eyebolt	A193 B7
11	Nut	A194 2H
12	Gland	GS-C25
13	Nipple	Brass
14	Stem Nut	A439 D2
15	Retaining Nut	Carbon Steel
16	Hand Wheel	A536
17	Name Plate	Stainless Steel
18	Nut	Carbon Steel
19	Grub Screw	Carbon Steel

● Materials of parts

No.	Part Name	Material
1	Body	GS-C25+13Cr
2	Wedge	GS-C25+13Cr
3	Stem	A182 F6
4	Nut	A194 2H
5	Bolt	A193 B7
6	Gasket	Graphite
7	Bonnet	GS-C25
8	Packing	Graphite
9	Pin	Carbon Steel
10	Gland EyeBolt	A193 B7
11	Nut	A194 2H
12	Gland	GS-C25
13	Yoke	GS-C25
14	Bearings	Alloy Steel
15	Nipple	Brass
16	Stem Nut	A439 D2
17	Retaining Nut	Carbon Steel
18	Hand Wheel	A536
19	Nut	Carbon Steel
20	Grub Screw	Carbon Steel

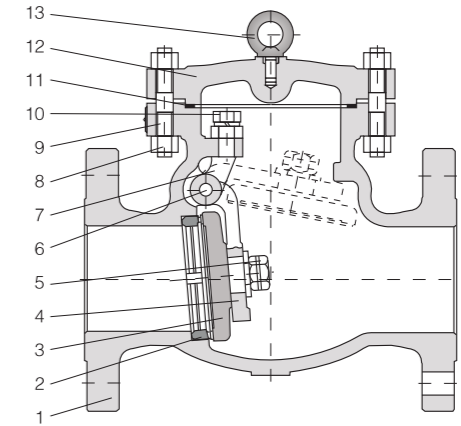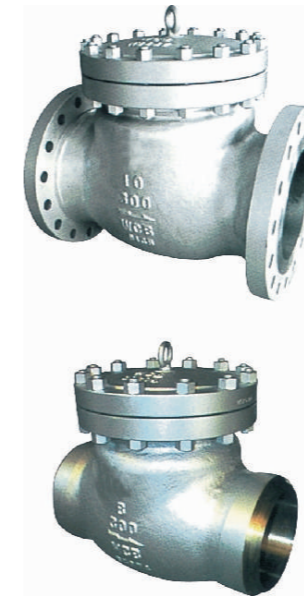

● Technical Specification

Design and Manufacture: BS1868 or API 6D  
 Inspection and Test: API 598 or API 6D  
 End flange dimension: ASME B16.5, ASME B16.47 A, MSS SP-44; ASME B16.47 B, API 605  
 BW end dimension: ASME B16.25  
 Face to face and end to end: ASME B16.10  
 Pressure-temperature ratings: ASME B16.34  
 Wall thickness dimension: API 600 and BS 1868


● Form of Major Part Material

Parts No.	Parts Name	Materials				
		WCB/Trim 1	WCB/Trim 5	WCB/Trim 8	CF8/304	CF8M/316
1	Body	ASTM A216 WCB	ASTM A216 WCB	ASTM A216 WCB	ASTM A351 CF8	ASTM A351 CF8M
2	Seat ring	A105 + 13Cr	A105 + STL	A105 + STL	ASTM A351 CF8	ASTM A351 CF8M
3	Disc	ASTM A216 WCB + 13Cr	ASTM A216 WCB + STL	ASTM A216 WCB + 13Cr	ASTM A351 CF8	ASTM A351 CF8M
4	Arm	ASTM A216 WCB	ASTM A216 WCB	ASTM A216 WCB	ASTM A351 CF8	ASTM A351 CF8M
5	Nut	ASTM A194 2H	ASTM A194 2H	ASTM A194 2H	ASTM A194 8	ASTM A194 8M
6	Arm pin	ASTM A182 F6a	ASTM A182 F6a	ASTM A182 F6a	ASTM A182 F304	ASTM A182 F316
7	Yoke	ASTM A216 WCB	ASTM A216 WCB	ASTM A216 WCB	ASTM A351 CF8	ASTM A351 CF8M
8	Bonnet nut	ASTM A194 2H	ASTM A194 2H	ASTM A194 2H	ASTM A194 8	ASTM A194 8M
9	Bonnet bolt	ASTM A193 B7	ASTM A193 B7	ASTM A193 B7	ASTM A193 B8	ASTM A193 B8M
10	Bolt	ASTM A193 B7	ASTM A193 B7	ASTM A193 B7	ASTM A193 B8	ASTM A193 B8M
11	Gasket	304 sheet + Graphite	304 sheet + Graphite	304 sheet + Graphite	304 + Graphite	316 + Graphite
12	Bonnet	ASTM A216 WCB	ASTM A216 WCB	ASTM A216 WCB	ASTM A351 CF8	ASTM A351 CF8M
13	Eye bolt	ASTM A181	ASTM A181	ASTM A181	ASTM A181	ASTM A181

Note: The chart above only lists out some common composition of steel check valve parts. We may provide other different parts material composition according to the customer's request or the actual valve working condition.




● Class 150 & Class 300 Cast Steel Swing Check Valve

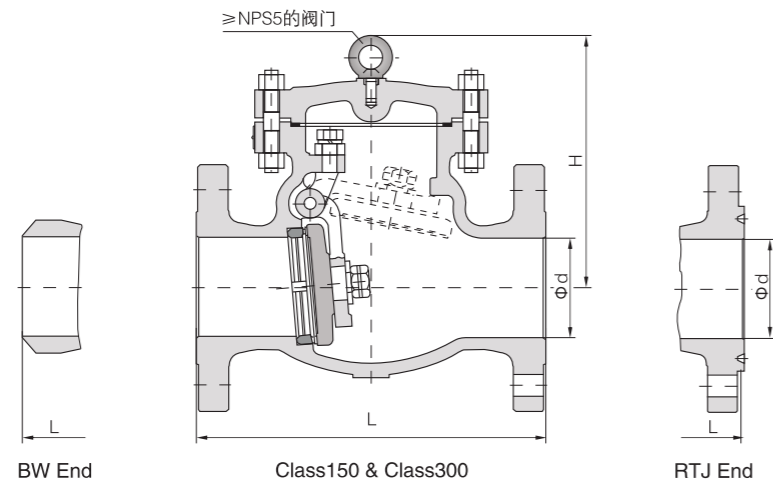

Size		Class 150						Class 300					
NPS	DN	Dimensions(mm)					Weight (kg)	Dimensions(mm)					Weight (kg)
		L			d	H		L			d	H	
		RF	RTJ	BW				RF	RTJ	BW			
2	50	203	216	203	51	132	15	267	283	267	51	144	20
2 1/2	65	216	229	216	64	147	20	292	308	292	64	149	35
3	80	241	254	241	76	176	27	318	333	318	76	210	40
4	100	292	305	292	102	198	45	356	371	356	102	260	61
5	125	330	343	330	127	255	58	400	416	400	127	295	80
6	150	356	368	356	152	320	69	445	460	445	152	326	130
8	200	495	508	495	203	380	131	533	549	533	203	380	190
10	250	622	635	622	254	440	219	622	638	622	254	440	296
12	300	699	711	699	305	480	321	711	727	711	305	520	450
14	350	787	800	787	337	530	380	838	854	838	337	540	640
16	400	864	876	864	387	580	560	864	879	864	387	588	850
18	450	978	991	978	438	618	630	978	994	978	438	670	1030
20	500	978	991	978	489	657	770	1016	1035	1016	489	720	1330
24	600	1295	1308	1295	591	760	960	1346	1368	1346	591	850	1950
26	650	1295	-	1295	633	840	1250	1346	1372	1346	633	920	2300
28	700	1448	-	1448	684	920	1580	1499	1524	1499	684	1150	2600
30	750	1524	-	1524	735	980	1950	1594	1619	1594	735	1260	3200

● Class 600~Class 2500 Cast Steel Swing Check Valve

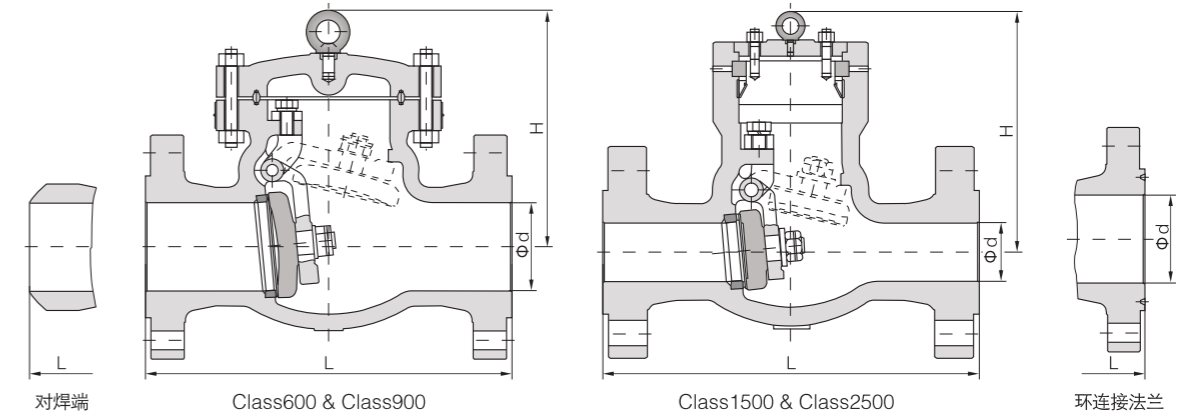

Size		Class 600						Class 900					
NPS	DN	Dimensions(mm)					Weight (kg)	Dimensions(mm)					Weight (kg)
		L			d	H		L			d	H	
		RF	RTJ	BW				RF	RTJ	BW			
2	50	292	295	292	51	170	28	368	371	368	51	200	48
2 1/2	65	330	333	330	64	178	40	419	422	419	64	220	75
3	80	356	359	356	76	246	68	381	384	381	76	280	95
4	100	432	435	432	102	290	117	457	460	457	102	320	135
5	125	508	511	508	127	320	155	559	562	559	127	360	200
6	150	559	562	559	152	360	192	610	613	610	152	400	264
8	200	660	664	660	203	430	340	737	740	737	203	480	424
10	250	787	791	787	254	502	515	838	841	838	254	560	730
12	300	838	841	838	305	554	750	965	968	965	305	632	1070
14	350	889	892	889	337	595	890	1029	1038	1029	322	680	1180
16	400	991	994	991	387	680	1303	1130	1140	1130	373	780	1790
18	450	1092	1095	1092	438	778	1800	1219	1232	1219	423	880	250
20	500	1194	1200	1194	489	970	2150	1321	1334	1321	471	1050	3080
24	600	1397	1407	1397	591	1100	3200	1549	1568	1549	522	1200	4600

Size		Class 1500						Class 2500					
NPS	DN	Dimensions(mm)					Weight (kg)	Dimensions(mm)					Weight (kg)
		L			d	H		L			d	H	
		RF	RTJ	BW				RF	RTJ	BW			
2	50	368	371	368	51	210	48	451	454	451	42	230	68
2 1/2	65	419	422	419	64	240	75	508	514	508	52	260	100
3	80	470	473	470	76	303	120	578	584	578	62	330	165
4	100	546	549	546	102	340	180	673	683	673	87	370	260
5	125	673	676	673	127	380	294	794	807	794	96	410	440
6	150	705	711	705	144	430	385	914	927	914	131	460	580
8	200	832	841	832	192	500	634	1022	1038	1022	179	530	970
10	250	991	1000	991	239	590	1140	1270	1292	1270	223	620	1700
12	300	1130	1146	1130	287	660	1650	1422	1445	1422	265	690	2600
14	350	1257	1276	1257	315	710	2000	-	-	-	-	-	-
16	400	1384	1407	1384	360	820	2700	-	-	-	-	-	-